

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 896 220 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

10.02.1999 Bulletin 1999/06

(51) Int. Cl.⁶: G01N 27/407

(21) Application number: 98114866.1

(22) Date of filing: 07.08.1998

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 07.08.1997 JP 213499/97

29.01.1998 JP 17270/98

(71) Applicants:

- NGK SPARK PLUG CO., LTD
Mizuho-ku Nagoya-shi Aichi (JP)
- HONDA MOTOR COMPANY LTD.
Tokyo 107 (JP)

(72) Inventors:

- Matsuzaki, Hiroshi
Iwakura-shi, Aichi (JP)
- Suzuki, Keiji
Inuyama-shi, Aichi (JP)

• Ookawa, Teppel

Kounan-shi, Aichi (JP)

• Kubota, Hiroshi

1-chome, Wako-shi, Saitama (JP)

• Hosogai, Seiichi

1-chome, Wako-shi, Saitama (JP)

• Fujita, Hiroyuki

1-chome, Wako-shi, Saitama (JP)

• Nakamura, Katsunori

1-chome, Wako-shi, Saitama (JP)

(74) Representative:

Vetter, Hans, Dipl.-Phys. Dr.

Patentanwälte Dipl.-Ing. Rudolf Magenbauer

Dipl.-Phys. Dr. Otto Reimold

Dipl.-Phys. Dr. Hans Vetter,

Dipl.-Ing. Martin Abel,


Hölderlinweg 58

73728 Esslingen (DE)

(54) Oxygen sensor

(57) An oxygen sensor is disposed downstream from a catalyst for purifying exhaust gas from an internal combustion engine and which can suppress an influence of unburnt hydrocarbon on an output voltage. After forming a platinum thin film on the outer periphery of a zirconia ceramic body, only a detection electrode of the ceramic body is dipped in a silver nitrate aqueous solution of 0.1 mol/l, and the silver nitrate is pyrolyzed through a heat treatment. Subsequently, a platinum reference electrode is formed on the inner periphery of the ceramic body. To protect the silver-doped detection electrode, a protective layer is formed on the surface of the detection electrode. By the exposure to combustion gas and through aging, a detection element is formed, and set into a metal case together with a cylindrical heater, to complete an oxygen sensor to be disposed downstream from a CNG engine catalyst.

FIG. 1A

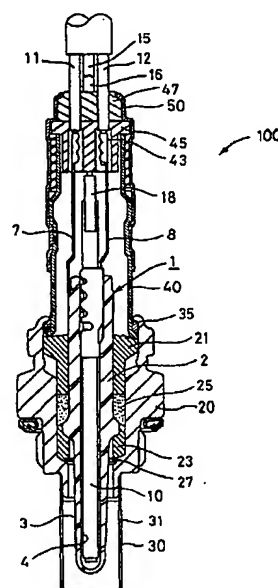

EP 0 896 220 A1

Best Available Copy

DescriptionFIELD OF THE INVENTION

5 [0001] The present invention relates to sensors, and more particularly to oxygen sensors.

BACKGROUND OF THE INVENTION

10 [0002] As a measure of the purifying capability of a catalyst for purifying exhaust gas from a gasoline engine (hereinafter referred to as the catalyst), the oxygen storage capability of the catalyst has been heretofore noted. It is known that the deterioration degree of the catalyst is estimated by measuring the oxygen storage capability with an oxygen sensor. The deterioration degree is the amount by which a catalyst has deteriorated, that is, by how much it has lost its effectiveness, from use over time. Examples of a method of detecting the catalyst deterioration include the following:

15 First Catalyst Deterioration Detecting Method

[0003] For example, in a case where an air/fuel ratio is controlled, via a carburetor or fuel injector, or by addition/reduction of air via a catalyst air pump, based on an output or an oxygen sensor disposed downstream from the catalyst, the deterioration degree of the catalyst can be estimated based on the output of the oxygen sensor. Note that the output voltage is inversely proportional to the oxygen at the sensor.

20 [0004] Specifically, as shown in Fig. 3A, at a time when the voltage output of the oxygen sensor downstream from the catalyst rises, the air/fuel ratio is controlled toward a lean side. At a time when the output of the oxygen sensor falls, the air/fuel ratio is controlled toward a rich side. Here, when the purifying efficiency of the catalyst is high, even if the air/fuel ratio is controlled toward the lean side when the output of the oxygen sensor downstream from the catalyst rises, the oxygen storage capability of the catalyst is high, so that oxygen is stored. Therefore, the output voltage of the oxygen sensor downstream from the catalyst still remains high. The output voltage does not drop until oxygen is sufficiently stored. Subsequently, when the output voltage lowers, the air/fuel ratio is controlled to the rich side. Since the stored oxygen is consumed, the output voltage of the oxygen sensor downstream from the catalyst still remains low. The output voltage does not increase until the stored oxygen is consumed. As aforementioned, when the purifying efficiency of the catalyst is high, a reversing time, i.e., a high-output keeping time plus a low-output keeping time is lengthened. When the purifying efficiency of the catalyst is lowered, however, the oxygen storage capability of the catalyst is lowered. Therefore, the reversing time is shortened as shown in Fig. 3B. Therefore, the deterioration degree of the catalyst can be detected by tracing the output voltage of the oxygen sensor downstream from the catalyst and judging whether the reversing time is long or short.

35 Second Catalyst Deterioration Detecting Method

[0005] In a case where the air/fuel ratio is controlled based on an output of an oxygen sensor disposed upstream of the catalyst, the deterioration degree of the catalyst is estimated based on an output of an oxygen sensor disposed downstream of the catalyst.

40 [0006] Specifically, when the purifying efficiency of the catalyst is high, the oxygen storage capability of the catalyst is high. Therefore, the change of the air/fuel ratio toward the rich/lean side in the exhaust gas before passing through the catalyst, i.e., the change of an oxygen partial pressure, is moderated by passing the exhaust gas through the catalyst. Specifically, as shown in Fig. 4A, irrespective of whether the air/fuel ratio of the exhaust gas before passing through the catalyst is rich or lean, the oxygen partial pressure of the exhaust gas after passing through the catalyst is reduced. The amplitude of the output voltage wave form of the oxygen sensor downstream from the catalyst is reduced. However, when the purifying efficiency of the catalyst is lowered, the oxygen storage capability of the catalyst is lowered. Therefore, even after the exhaust gas is passed through the catalyst, the change of the air/fuel ratio to the rich/lean side in the exhaust gas before passing through the catalyst is kept as it is and fails to be moderated. Specifically, as shown in Fig. 4B, the change of the air/fuel ratio to the rich/lean side in the exhaust gas before passing through the catalyst results in the change in the oxygen partial pressure of the exhaust gas after passing through the catalyst. The amplitude of the output voltage wave form of the oxygen sensor downstream from the catalyst is increased in the same manner as in the front oxygen sensor. Therefore, the deterioration degree of the oxygen storage capability of the catalyst can be detected by tracing the change of the output voltage of the oxygen sensor downstream from the catalyst and judging whether the amplitude of the output voltage wave form is large or small.

55 [0007] Additionally, in the aforementioned first or second catalyst deterioration detecting method, the oxygen sensor downstream from the catalyst may be used only for detecting the deterioration of the catalyst.

[0008] However, in a case where the deterioration degree of the catalyst for in engine using compressed natural gas

or CNG fuel or the like is estimated in the same manner as the first or second catalyst deterioration detecting method, defects arise and the catalyst deterioration cannot be detected.

[0009] Specifically, when the purifying ratio of the catalyst is high, that is, even when the catalyst has not deteriorated, in the first catalyst deterioration detecting method, as shown in Fig. 3C, the reversing time of the output voltage of the oxygen sensor downstream from the catalyst is shortened in a certain temperature range irrespective of the deterioration state of the catalyst, because of the influence of a large amount of methane contained in the CNG fuel. Furthermore, in the second catalyst deterioration detecting method, as shown in Fig. 4B, the problem is that the amplitude of the output voltage wave form of the oxygen sensor downstream from the catalyst changes in the same manner as when the catalyst has deteriorated.

[0010] More specifically, since the methane contained in the exhaust gas is not sufficiently burnt even after passing through the catalyst, unburnt methane remains. When a detection electrode of the oxygen sensor downstream from the catalyst has a low temperature, however, the unburnt methane does not react with oxygen in the vicinity of the detection electrode. Therefore, no change occurs in the oxygen partial pressure, and the output voltage of the oxygen sensor downstream from the catalyst is not influenced.

[0011] However, when the temperature of the detection electrode of the oxygen sensor downstream from the catalyst reaches or exceeds a certain temperature, in the first catalyst deterioration detecting method, the unburnt methane causes a burning reaction with the oxygen on the detection electrode. Therefore, a difference in oxygen concentration between a reference electrode and the detection electrode changes in accordance with the concentration of methane. If the amount of methane exceeds the stoichiometric amount at a time when methane causes a burning reaction with the oxygen in the exhaust gas, the oxygen of the detection electrode is drawn away. Therefore, the output voltage is largely raised. If the amount of methane is equal to or less than the stoichiometric amount, no oxygen at the detection electrode is drawn away. Therefore, the output voltage is lowered. As a result, the reversing cycle depends on the methane concentration, but does not depend on the oxygen storage capability of the catalyst. The burning reaction becomes significant as the temperature of the detection electrode rises. Therefore, the reversing time of the oxygen sensor downstream from the catalyst becomes shorter as the temperature of the detection electrode rises.

[0012] Moreover, when the temperature of the detection electrode of the oxygen sensor downstream from the catalyst reaches or exceeds a certain temperature, in the second catalyst deterioration detecting method, the unburnt methane causes a burning reaction with the oxygen at the detection electrode. Since the oxygen at the detection electrode is drawn away, a difference in the oxygen partial pressure is generated. The output voltage is largely raised in accordance with the methane concentration, i.e., when the methane concentration is high or the air/fuel ratio is rich. For this reason, even if the catalyst is normal, the output voltage of the oxygen sensor downstream from the catalyst changes in accordance with the change of the air/fuel ratio toward rich/lean. Therefore, the catalyst deterioration cannot be detected.

[0013] As aforementioned, in the case where the deterioration degree of the catalyst for the engine using the CNG fuel or the like is detected based on an output signal of the oxygen sensor downstream from the catalyst, a problem remains unsolved in that the output voltage of the oxygen sensor downstream from the catalyst is not stabilized because of the burning reaction of the oxygen in the vicinity of the detection electrode with the unburnt methane.

SUMMARY OF THE INVENTION

[0014] Wherefore, an object of the present invention is to provide an oxygen sensor which is disposed downstream from a catalyst for purifying exhaust gas from an internal combustion engine and which can suppress an influence of unburnt hydrocarbon on an output voltage.

[0015] To attain this and other objects, the present invention provides an oxygen sensor which has a detection electrode on one face of a solid electrolytic body having an oxygen ion conductivity and a reference electrode on the other face thereof and which is disposed downstream from a catalyst for purifying an exhaust gas from an internal combustion engine using fuel which contains hydrocarbon having a ratio of hydrogen to carbon of 3:1 or more, i.e., $H/C \geq 3$.

[0016] The oxygen sensor is provided with an output inhibitor for controlling an output voltage, which changes in accordance with the concentration of hydrogen or carbon monoxide, in such a manner that the output voltage, which depends on the concentration of hydrocarbon, is prevented from exceeding a reference level by which it is determined whether an air/fuel ratio is rich or lean.

[0017] As the solid electrolytic body having the oxygen ion conductivity, ceramics such as a ceramic mainly composed of zirconium oxide are preferable. The solid electrolytic body can be obtained by mixing raw-material powder of zirconium oxide or the like with sintering assistant powder of yttrium oxide, silicon oxide, magnesium oxide or the like, granulating the mixture, forming a predetermined configuration, calcining as the case may be, and subsequently sintering.

[0018] As aforementioned, when the solid electrolytic body is prepared, after mixing and granulating, the predetermined configuration, e.g., a cup or bottomed cylindrical configuration, a plate configuration or the like is formed. The forming is performed in a rubber pressing or by another pressing method, a thick-film or other laminating method, or the like.

[0019] The detection electrode and the reference electrode formed on the solid electrolytic body are each formed as a thin-film electrode of a conductive material mainly composed of a noble metal element having a catalyst action to promote the burning of hydrocarbon or another unburnt gas, e.g., at least one component selected from the group consisting of platinum, rhodium, palladium, ruthenium, osmium, iridium and the like. These electrodes can be formed in a plating method, a sputtering method, a pyrolysis of metal-salt, or the like.

[0020] The oxygen sensor of the invention is suitable for detecting the deterioration of the catalyst for the internal combustion engine which uses the fuel containing hydrocarbon with the hydrogen/carbon ratio of 3:1 or more. Even after passing through a normal catalyst, the hydrocarbon with the hydrogen/carbon ratio of 3:1 or more represented by methane remains unburnt in the catalyst, and reaches the oxygen sensor disposed downstream from the catalyst as it is. When the temperature of the detection electrode of the oxygen sensor is sufficiently high, the hydrocarbon is burnt around the detection electrode. Therefore, the oxygen around the detection electrode is consumed, thereby lowering the oxygen partial pressure and raising the output voltage.

[0021] Here, even if the exhaust gas having passed through the normal catalyst contains unburnt hydrocarbon, the unburnt hydrocarbon should have no influence on the determination of the rich/lean state. In this respect, according to the oxygen sensor of the invention, the output voltage dependent on the fuel containing hydrocarbon (like methane) is less than the reference level by which the air/fuel ratio is determined to be rich or lean. Therefore, even if the output voltage is raised by burning the unburnt hydrocarbon in the vicinity of the detection electrode, the output voltage does not exceed the reference level. The unburnt hydrocarbon has no influence on the determination of the rich/lean state. Here, the reference level is preferably determined in a range of 400 to 600 mV. If the reference level is outside the range, the center of the amplitude of the output voltage wave form of the oxygen sensor has deviated. Since the reversing cycle becomes irregular, deterioration cannot be easily detected with sufficient precision.

[0022] According to the invention, in the oxygen sensor, the influence of the unburnt hydrocarbon on the output voltage can be suppressed. As a result, deterioration of the catalyst can be effectively detected with high precision. Specifically, even in either the first or second catalyst deterioration detecting method described above, deterioration of the catalyst can be detected with high precision. Moreover, the engine can be controlled based on the output voltage of the oxygen sensor.

[0023] Additionally, the output inhibitor of the invention may function by inhibiting the catalyst activity of the detection electrode itself, or may function by generating a difference in the rate gasses such as hydrogen, carbon monoxide and hydrocarbon reach the detection electrode. In the former case, impurities such as gold, silver, copper, lead and the like may be added as dopants in the detection electrode. The catalyst activity point of a detection electrode surface may be decreased by heating the detection electrode to a temperature higher than the usual operation temperature of the oxygen sensor, for example, to 1200°C or higher, or by forming the detection electrode of a thinner plating film as compared with a typical oxygen sensor. The detection electrode with a low catalyst activity may be formed by plating with platinum containing a slight amount of impurities such as gold, silver, copper, lead and the like. Furthermore, the detection electrode may be formed of a material having a low catalyst activity such as iridium and the like. In the latter case, the influence of the hydrocarbon on the oxygen sensor output may be relatively decreased by thickening a porous protective layer on the detection electrode or lowering the porosity of the porous protective layer to increase the diffusion resistance of the detected gas component to the detection electrode. Moreover, the contribution of the hydrocarbon to the oxygen sensor output may be inhibited by reducing the size or the number of vent holes in a protector which covers the periphery of the detecting element or oxygen sensor to allow the protector to have gas selection properties.

[0024] On the other hand, when the oxygen sensor of the invention only satisfies the condition that the output voltage dependent on the hydrocarbon concentration is less than the reference level for determining the air/fuel ratio to be rich or lean within the sensor's active temperature, catalyst deterioration is sufficiently detected. Moreover, in this case, the engine can be sufficiently controlled based on the output voltage of the oxygen sensor disposed downstream from the catalyst. Here, the sensor's active temperature is a temperature which can be appropriately determined in accordance with a system incorporating the oxygen sensor and which corresponds to a sensor impedance set sufficiently low relative to an impedance on a system measurement side. Specifically, for example, when the measurement-side impedance is 500k Ω to 1M Ω , the sensor impedance is set to 50k Ω to 100k Ω .

[0025] Furthermore, in the oxygen sensor of the invention, the actual operation temperature ranges to, for example, 900°C. However, if the output voltage dependent on the hydrocarbon concentration is less than the reference level at 400°C or a higher temperature, that temperature is sufficient and preferable for the detection of the catalyst deterioration and for the control of the engine based on the output voltage of the oxygen sensor disposed downstream from the catalyst. At 400°C or lower temperatures, the detection electrode cannot be sufficiently activated because of the change in nature caused by long-term use. In this case, there is a disadvantageous possibility in the first catalyst deterioration detecting method that the reversing cycle will not be accelerated because of a response delay or that reversing will not be performed because of an insufficient output. There is a disadvantageous possibility in the second catalyst deterioration detecting method that the output voltage will become substantially constant regardless of catalyst deterioration and that the deterioration will not be detected. The catalyst deterioration is detected in a predetermined operation state.

The oxygen sensor temperature ranges, for example, from 400 to 600°C in accordance with the operation state. Therefore, the aforementioned conditions are preferably satisfied in the predetermined operation state.

[0026] Moreover, in the oxygen sensor of the invention, the detection electrode is mainly composed of a noble metal element which has a catalytic action to promote the burning of unburnt gas of the hydrocarbon-containing fuel, and has, at least on its surface, at least one element selected from the group consisting of silver, copper, gold and lead. This composition is preferable for obtaining the effects of the invention. The detection electrode can be manufactured, for example, by dipping the detection electrode into an aqueous solution of a metal salt at a predetermined concentration and subsequently pyrolyzing the metal salt. Examples of the metal salt include silver salt, copper salt, gold salt and lead salt. The inactivity of the detection electrode changes in accordance with the concentration of the aqueous solution of metal salt, but the conditions of the invention can be satisfied by appropriately setting the concentration to, for example, 0.05 to 0.5 mol/l.

[0027] Furthermore, according to the oxygen sensor of the invention, in the detection electrode, the average particle size of the noble metal element is 2µm or more, which is preferable for obtaining the effects of the invention. The detection electrode can be manufactured by sintering the detection electrode mainly composed of the noble metal element at a temperature higher by, for example, 100 to 300°C than usual.

[0028] Additionally, the oxygen sensor of the invention is preferably provided with the following two characteristics:

(1) the output voltage does not exceed the reference level under the condition that the sensor temperature is 400°C in an atmosphere containing 3000ppm of methane, 1200ppm of oxygen, with the rest being non-combustible gas; and

(2) the output voltage exceeds the reference level under the condition that the sensor temperature is 400°C in an atmosphere containing 3300ppm of hydrogen, 1000ppm of oxygen, with the rest being non-combustible gas.

[0029] In the above (1), the methane concentration in the atmosphere is 3000ppm, which is equal to or more than the maximum concentration of hydrocarbon in the actual exhaust gas having passed through the catalyst of the internal combustion engine using the methane-containing fuel. Specifically, if the oxygen sensor is sufficiently operated with this concentration, there is no problem about the detecting of deterioration. Moreover, no problems will arise if the engine is controlled based on the output voltage of the oxygen sensor disposed downstream from the catalyst.

[0030] Furthermore, in the above (1), the oxygen concentration in the atmosphere is 1200ppm, which is a properly set value equal to or less than the stoichiometric amount at which the total amount of methane can be burnt. In a case where oxygen is supplied exceeding the stoichiometric amount, the oxygen partial pressure cannot be sufficiently reduced because of the presence of surplus oxygen even if the total amount of methane is burnt in the vicinity of the oxygen sensor detection electrode. Additionally, the output voltage is not generated in some cases. In this case, the influence of methane cannot be precisely evaluated.

[0031] Moreover, in the above (1), the point where the output voltage does not exceed the reference level is defined under the condition described above. Therefore, in a case where the purifying efficiency of the catalyst is normally high, even if the output voltage is raised by the influence of methane, the value of the output voltage does not exceed the reference level. Consequently, the determination of the air/fuel ratio to be rich or lean is prevented from being influenced by the unburnt hydrocarbon.

[0032] On the other hand, in the above (2), the output voltage needs to be equal to or higher than the reference level under the conditions that the sensor temperature is 400°C in an atmosphere containing 3300ppm of hydrogen, 1000ppm of oxygen, with the rest being non-combustible gas. If the activity of the oxygen sensor detection electrode drops so as to become inactive not only to methane but also to hydrogen, the deterioration of the catalyst of the internal combustion engine using the fuel containing hydrocarbon with the hydrogen/carbon ratio of 3:1 or more cannot be detected. Therefore, the minimum activity of the detection electrode necessary for the detection of the catalyst deterioration is defined. Furthermore, if the detection electrode has such an activity, there is no problem with engine control based on the output voltage of the oxygen sensor disposed downstream from the catalyst. Additionally, the concentrations of hydrogen and oxygen are set in such a manner that in a case of a reaction between hydrogen and oxygen, hydrogen becomes a surplus.

[0033] It is preferable that the oxygen sensor of the invention is provided with the above characteristics (1) and (2) even after the oxygen sensor is exposed to the exhaust gas of the internal combustion engine using the hydrocarbon-containing fuel with the hydrogen/carbon ratio of 3:1 or more at 900°C for 1000 hours. A durability test in which the exposure to exhaust gas is performed at 900°C for 1000 hours is typical for automobile oxygen sensors. If the characteristics are unchanged even after the test, the oxygen sensor can be actually operated over a long period with high reliability. Additionally, parts do not need to be replaced frequently. In this case, when the detection electrode is mainly composed of the noble metal element having the catalytic action to promote the burning of unburnt gas of the hydrocarbon-containing fuel, and has at least one element selected from the group consisting of silver, copper and gold, at least on its surface, then the detection electrode is provided with the above characteristics (1) and (2) as initial characteristics

at the time of manufacture. Moreover, the characteristics will be maintained even after the durability test.

BRIEF DESCRIPTION OF THE DRAWINGS

5 [0034]

Fig. 1A is a sectional view showing the whole of an oxygen sensor embodying the invention;

Fig. 1B is an enlarged sectional view of a detection element which is the main part of an oxygen sensor;

Fig. 2 is a graph showing the relationship between a sensor temperature and a sensor output;

10 Figs. 3A, 3B and 3C are explanatory views of a first catalyst deterioration detecting method by an oxygen sensor disposed downstream from a catalyst; and

Figs. 4A and 4B are explanatory views of a second catalyst deterioration detecting method by the oxygen sensor disposed downstream from the catalyst.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0035] Preferred embodiments of the present invention will be described.

[0036] As shown in Fig. 1A, an oxygen sensor 100 comprises a detection element 1, ceramic heater 10, a metal shell 20, protective cap 30, an inner barrel 40, an outer barrel 50, and the like. The bar-shaped ceramic heater 10, which is for heating and activating the detection element 1, is inserted in the inside space of the detection element 1. The detection element 1, which is surrounded by cylindrical ceramic holding elements 21, 23, talc powder 25, a packing 27, and the like, is disposed inside the metal shell 20 composed of a heat resisting metal. On the lower part of the metal shell 20, a protective cap 30 which is provided with a hole 31 in order to let in a gas to be detected is mounted in such a manner that the cap covers the end portion of the detection element 1. On the upper part of the metal body 20, the inner barrel 40 composed of heat resisting metal is mounted with an intervening O-ring 35 in such a manner that the inner barrel 40 covers the upper part of the detection element 1 and the ceramic heater 10, and on the upper part of the inner barrel 40 is attached the outer barrel 50 composed of a heat resisting metal. A ceramic separator 45 and a grommet rubber 47 are disposed between the inner barrel 40 and the outer barrel 50 in order to prevent water and the like from getting into the inside of the oxygen sensor 100. Lead wires 11, 12 for taking signals from a detection electrode 3 and a reference electrode 4, which constitute the detection element 1, are connected to connecting terminals 7, 8 of the detection element 1. A connecting terminal 18 of the ceramic heater 10 is connected to lead wires 15, 16 for providing the ceramic heater 10 with electricity. The lead wires 11, 12 as well as the lead wires 15, 16 pass through holes 43 in the ceramic separator 45 then the grommet rubber 47, and extend to the outside.

[0037] As shown in Fig. 1B, the detection element 1 comprises a cup-shaped ceramic body 2, the detection electrode 3 provided on an outer periphery of the ceramic body 2, the reference electrode 4 provided on the inner periphery of the ceramic body 2, and a protective layer 5 provided on an outer periphery of the detection electrode 3. On the surface of the detection electrode 3, a doped layer 6 having the function of inhibiting the output voltage which depends on the concentration of hydrocarbon contained in an exhaust gas from causing the output voltage to exceed the reference level by which it is determined whether an air/fuel ratio is one of rich and lean is formed.

40 [0038] Next, a method of manufacturing the oxygen sensor 100 will be explained.

First Example

[0039] After blending Y_2O_3 having a purity of 99% or more with ZrO_2 having a purity of 99% or more in the proportion of 5mol to 100mol and wet-mixing the mixture, calcining was performed at 1300°C. Water was applied to the calcined material. Subsequently, after grinding in a ball mill, water-soluble binder was applied, and granulation was performed via a spray-drying method.

[0040] The granulated material was formed into a cup or bottomed cylindrical configuration using a rubber pressing method, and ground with a grindstone. Subsequently, by sintering the formed material at 1500°C for three hours, a zirconia ceramic body was obtained. A platinum thin film having a thickness of 1 to 2 μ m was formed on the exterior periphery of the ceramic body in an electroless plating method to form a detection electrode. Thereafter, the platinum thin film was thermally treated in an atmospheric environment at 1200°C for 90 minutes. Thereby, the denseness of the platinum thin film constituting the detection electrode was enhanced and stabilized.

[0041] Subsequently, the detection electrode of the ceramic body only was dipped in a silver nitrate aqueous solution of 0.1 mol/l at room temperature for ten seconds, and heated at 800°C for 60 minutes in the atmospheric environment to pyrolyze silver nitrate.

[0042] Subsequently, a platinum reference electrode was formed on the inner periphery of the ceramic body in the electroless plating method to form a thickness of 1 to 2 μ m.

[0043] In order to protect the silver-doped detection electrode, a protective layer of spinel powder of magnesium aluminate with a thickness of about 200 μ m was formed on the surface of the detection electrode in a plasma spray coating method.

[0044] By the exposure to combustion gas and through aging, a detection element was formed as shown in Fig. 1B. The detection element was set into a metal case together with a cylindrical heater, to complete an oxygen sensor for a CNG engine.

[0045] As a result of an Auger analysis on the surface of the detection electrode, before the protective layer of spinel powder was formed, the presence of silver was confirmed. On the other hand, after an about 100 \AA thick portion of a metal-particle surface layer forming the surface of the detection electrode was removed by an ion sputtering method, the Auger analysis was performed in the same manner. In the ion sputtering method, argon ion was radiated from a differential exhaust type micro-beam ion gun for several seconds with the ion energy being 3kV. The result was that no silver was found. Therefore, in the case where the detection electrode formed through plating is dipped in the silver compound solution to impregnate the detection electrode with silver, it is judged that silver is present only in the surface layer.

[0046] In the case where the detection electrode was completely melted with aqua regia, heated to evaporate the acid, and an ICP spectral analysis was conducted to determine the concentration of silver, 0.029 μ g of silver per 1mm² of the detection electrode was present.

Second Example

[0047] An oxygen sensor was prepared in the same manner as in the first example, except that a detection electrode was dipped in a silver nitrate aqueous solution of 0.5 mol/l.

Third Example

[0048] An oxygen sensor was prepared in the same manner as in the first example, except that a detection electrode was dipped in a gold cyanide aqueous solution of 0.05 mol/l.

Fourth Example

[0049] An oxygen sensor was prepared in the same manner as in the first example, except that a detection electrode was dipped in a copper acetate aqueous solution of 0.5 mol/l.

Fifth Example

[0050] An oxygen sensor was prepared in the same manner as in the first example, except that a detection electrode was dipped in a lead acetate aqueous solution of 0.01 mol/l.

Sixth Example

[0051] An oxygen sensor was prepared in the same manner as in the first example, except that the dipping of the detection electrode in the silver nitrate aqueous solution and the subsequent heating treatment at 800°C were omitted, the temperature of the atmospheric heat treatment after forming the detection electrode was raised from 1200°C to 1400° to advance the sintering of the platinum forming the detection electrode, and the crystal grain diameter was set to 3.0 μ m.

First Comparative Example

[0052] An oxygen sensor was prepared in the same manner as in the first example, except that the dipping of the detection electrode in the silver-nitrate aqueous solution and the subsequent heating treatment at 800°C were omitted. In the first comparative example, the detection electrode does not contain a metal selected from the group consisting of silver, copper, gold and lead, and its crystal grain diameter is 1.6 μ m, as in a conventional oxygen sensor.

Performance Evaluation Test

[0053] The oxygen sensors of the first to sixth examples and the first comparative example were exposed to the atmosphere containing 3000ppm methane, 1200ppm oxygen, 9% carbon dioxide and the rest nitrogen. The output voltage of each oxygen sensor was monitored while changing a voltage applied to a cylindrical heater. Thereby, the rela-

tionship between a detection-electrode surface temperature, i.e., a sensor temperature or chip temperature, and the sensor output voltage was measured. The composition of the atmosphere was determined by referring to the actual exhaust gas composition of the CNG engine.

[0054] Moreover, the oxygen sensors were exposed to the atmosphere containing 3300ppm hydrogen, 1000ppm oxygen and the rest nitrogen, and the output voltage of each oxygen sensor was measured at the sensor temperature of 400°C.

[0055] Furthermore, to test the durability of each oxygen sensor, after each oxygen sensor was exposed to the engine exhaust gas at 900°C for 1000 hours, measurement was performed in the same manner. The results are shown in Table 1 and the graph of Fig. 2.

[0056] The reference level for determining the air/fuel ratio to be rich or lean was 500mV, and the deterioration detecting temperature was 400°C.

TABLE 1

OXYGEN SENSOR OUTPUT (mV) ON EACH CONDITION

	TEMP (°C)	CH ₄ -CONTAINING GAS						H ₂ -CONTAINING GAS	
		INITIAL			AFTER DURABILITY TEST			INITIAL	AFTER DURABILITY TEST
		200	400	600	200	400	600	400	400
EXAMPLE 1	50	180	450	80	180	500	850	860	
EXAMPLE 2	50	100	150	60	120	200	860	870	
EXAMPLE 3	150	210	500	160	230	520	900	910	
EXAMPLE 4	60	110	170	70	130	210	880	870	
EXAMPLE 5	130	150	400	150	720	900	890	890	
EXAMPLE 6	200	350	900	180	340	880	900	880	
COMPAR. EXAMPLE 1	250	950	920	240	930	900	950	900	

[0057] As clearly seen from Table 1 and Fig. 2, when the first to fourth examples are exposed to methane-containing gas, in the initial state, i.e., before the durability test, the output voltage is 300mV or less at the chip temperature, i.e., the deterioration detecting temperature of 400°C. Specifically, the output voltage is 100 to 210mV, which is less than the reference level and hardly changes even after the durability test. In the sixth example, in the initial state or before the durability test, the output voltage is 350mV at the chip temperature of 400°C. Although the sixth example is slightly less effective, as compared with the first to fourth examples, its output voltage does not exceed the reference level and does not change even after the durability test. Furthermore, as clearly seen from Table 1, when the first to fourth and sixth examples are exposed to hydrogen-containing gas, each output voltage is 850mV or more, and thus above the reference level, at the chip temperature of 400°C both in the initial state and after the durability test. The output voltages of the first to fourth and sixth examples are equal to or higher than the reference level against the hydrogen-containing gas either in the initial state or after the durability test, and do not exceed the reference level against the gas containing a sufficient amount of methane. Moreover, in the first to fourth and sixth embodiments, when the concentration of hydrogen and carbon monoxide are changed, the output voltage changes in accordance with the concentration. The results show that each of the oxygen sensors in the first to fourth and sixth examples can be practically used for a long period as the oxygen sensor disposed downstream from the catalyst for the CNG engine.

[0058] Furthermore, as clearly seen from Table 1 and Fig. 2, in the fifth example in which lead is doped in the detection electrode, the output voltage is 300mV or less, specifically 150mV which is below the reference level, at the chip temperature of 400°C against the methane-containing gas in the initial state. After the durability test, however, the output voltage exceeds the reference level and reaches 720mV at the same temperature. Moreover, as clearly seen from Table 1, the output voltage is 890mV, and thus above the reference level, at the chip temperature of 400°C against the hydrogen-containing gas both in the initial state and after the durability test. Therefore, it can be concluded that the oxygen sensor of the fifth example can be practically used for only a short period as the oxygen sensor downstream from the CNG engine catalyst.

[0059] In the first comparative example, impurities such as silver are not doped in the detection electrode, and the

crystal grain diameter of platinum is less than 2 μ m. In a conventional oxygen sensor like this, when the chip temperature is 400°C or higher, the output voltage reaches 950mV above the reference level against the methane-containing gas in the initial state. It is seen that the oxygen sensor of the first comparative example is not suitable as the oxygen sensor downstream from the CNG engine catalyst.

[0060] In the first and fifth examples, the detection electrode before being provided with the protective layer of spinel powder was completely melted with an aqua regia. The treatment liquid was analyzed with an ICP spectral analysis to quantitatively analyze the doped metal element. The concentration of the treatment liquid of the fifth example was a tenth part of that of the first example, but the doped amount of the fifth example was substantially equal to that of the first example. Therefore, it can be judged that the difference in durability between the first and fifth examples are caused by the metal dopant, not by a difference in the dopant amount.

[0061] The invention is not restricted to the embodiments described above, and can be varied within the scope of the invention as defined by the appended claims.

Claims

1. An oxygen sensor for being disposed downstream from a catalyst for purifying an exhaust gas from an internal combustion engine using fuel which contains hydrocarbon having a ratio of hydrogen to carbon of at least 3:1, the oxygen sensor (100) having a detection electrode (3) on one exterior surface of a solid electrolytic body (2) having an oxygen ion conductivity and having a reference electrode (4) on an opposed exterior surface on the solid electrolytic body (2), and the oxygen sensor (100) further comprising;

an output inhibiting means (3;3,6;3,5) for controlling an output voltage of the oxygen sensor (100), and the output voltage varying in accordance with a concentration of oxygen and at least one of hydrogen, carbon monoxide and hydrocarbon, in such a manner that the output voltage which depends on the concentration of hydrocarbon is prevented from causing the output voltage to exceed a reference level by which it is determined whether an air/fuel ratio is one of lean and rich.

2. The oxygen sensor according to claim 1, wherein the output inhibiting means (3;3,6;3,5) inhibits the output voltage which is dependent on the concentration of hydrocarbon from causing the output voltage to exceed the reference level for determining the air/fuel ratio to be one of rich and lean within the range of a sensor active temperature.

3. The oxygen sensor according to claim 1, wherein the output inhibiting means (3;3,6;3,5) inhibits the output voltage which is dependent on the concentration of hydrocarbon from causing the output voltage to exceed the reference level for determining the air/fuel ratio to be one of rich and lean at at least 400°C.

4. The oxygen sensor according to anyone of claims 1 to 3, wherein the reference level is in a range between about 400mV to about 600mV.

5. The oxygen sensor according to anyone of claims 1 to 4, wherein the output inhibiting means (3,6) comprises the detection electrode (3), and the detection electrode (3) is mainly composed of a noble metal which has a catalytic action to promote burning of any unburnt hydrocarbon-containing fuel and the detection electrode (3) contains, at least on an exposed surface (6) thereof, at least one element selected from the group consisting of silver, copper, gold, and lead.

6. The oxygen sensor, according to claim 5, wherein the noble metal is platinum.

7. The oxygen sensor according to anyone of claims 1 to 4, wherein the output inhibiting means (3) comprises the detection electrode (3), the detection electrode (3) is composed mainly of a noble metal which has a catalytic action to promote burning of any unburnt hydrocarbon-containing fuel, and the noble metal element has an average particle diameter of at least 2 μ m.

8. The oxygen sensor according to anyone of claims 1 to 4, wherein the output inhibiting means (3) comprises the detection electrode (3) having a catalyst inhibitor for inhibiting a catalyst activity.

9. The oxygen sensor according to claim 8, wherein the detection electrode (3) is made from iridium.

10. The oxygen sensor according to anyone of claims 1 to 4, wherein the output inhibiting means (3,5) comprises a gas limiting means (5) for limiting the flow of hydrocarbons to the detection electrode (3).

11. The oxygen sensor of claim 10, wherein the gas limiting means (5) is a protective layer (5) disposed about the detecting electrode (3) and has a porosity which allows oxygen is to pass therethrough but limits the flow of hydrocarbon therethrough.

5 12. The oxygen sensor of claim 11, wherein the protective layer (5) is composed of magnesium aluminate and has a thickness of about 200 μ m.

13. The oxygen sensor according to anyone of claims 1 to 12, wherein, when the sensor temperature is around 400°C and in an atmosphere containing 3000 ppm methane, 1200 ppm oxygen, with the remainder being non-combustible gasses, the output voltage is below the reference level; and

10 the output voltage is at least at the reference level when the sensor temperature is around 400°C and in an atmosphere containing 3300 ppm hydrogen, 1000 ppm oxygen, with the remainder being non-combustible gasses.

14. The oxygen sensor according to anyone of claims 1 to 12, wherein even after the oxygen sensor (100) is exposed, at 900°C for 1000 hours, to the exhaust gas from the internal combustion engine using the hydrocarbon-containing fuel with the ratio of hydrogen to carbon of at least 3:1, the oxygen sensor (100) maintains characteristics that the output voltage does not exceed the reference level under the condition that the sensor temperature is 400°C in the atmosphere containing 3000 ppm methane, 1200 ppm oxygen, with the remainder being non-combustible gasses, and that the output voltage is at least at the reference level under the conditions that the sensor temperature is 400°C in the atmosphere containing 3300 ppm hydrogen, 1000 ppm oxygen, with the remainder being non-combustible gasses.

FIG. 1A

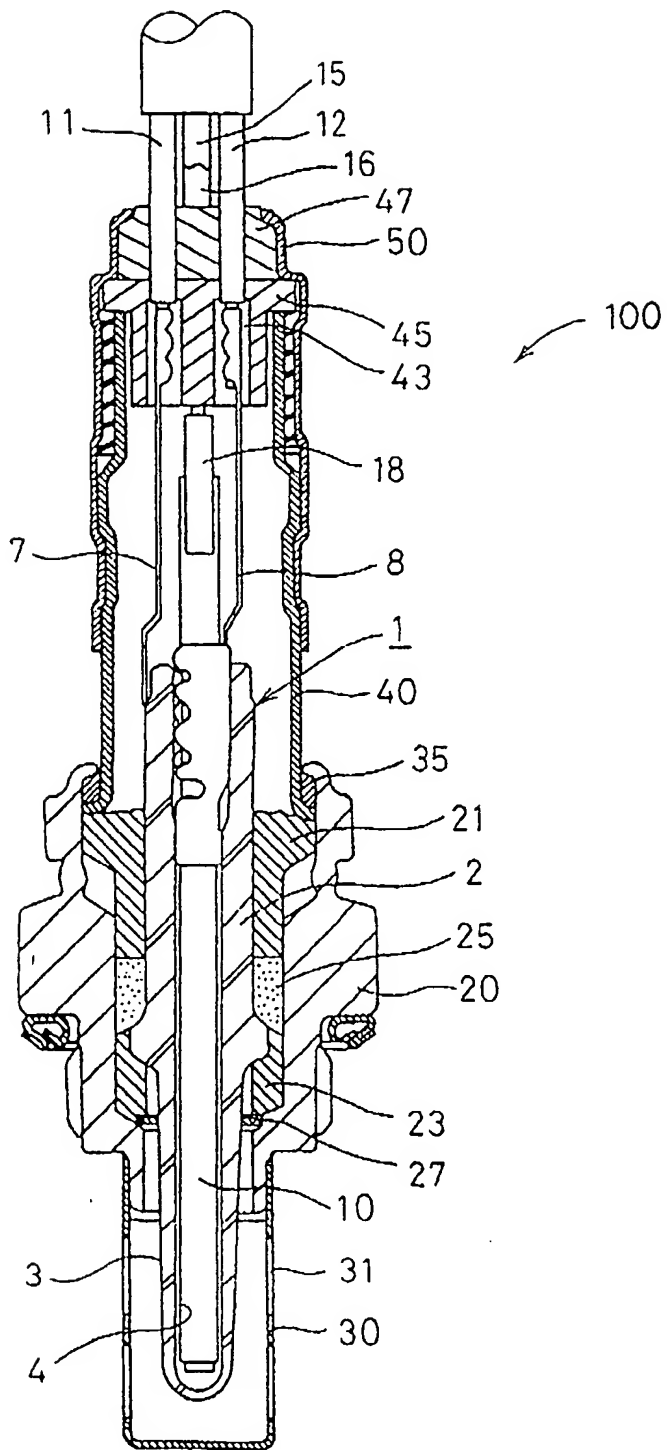


FIG.1B


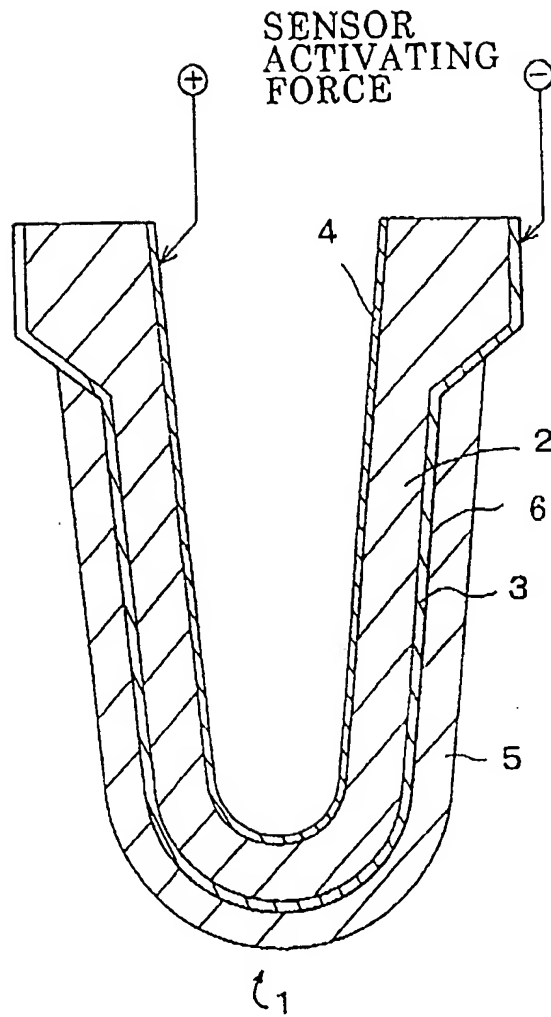


FIG. 2

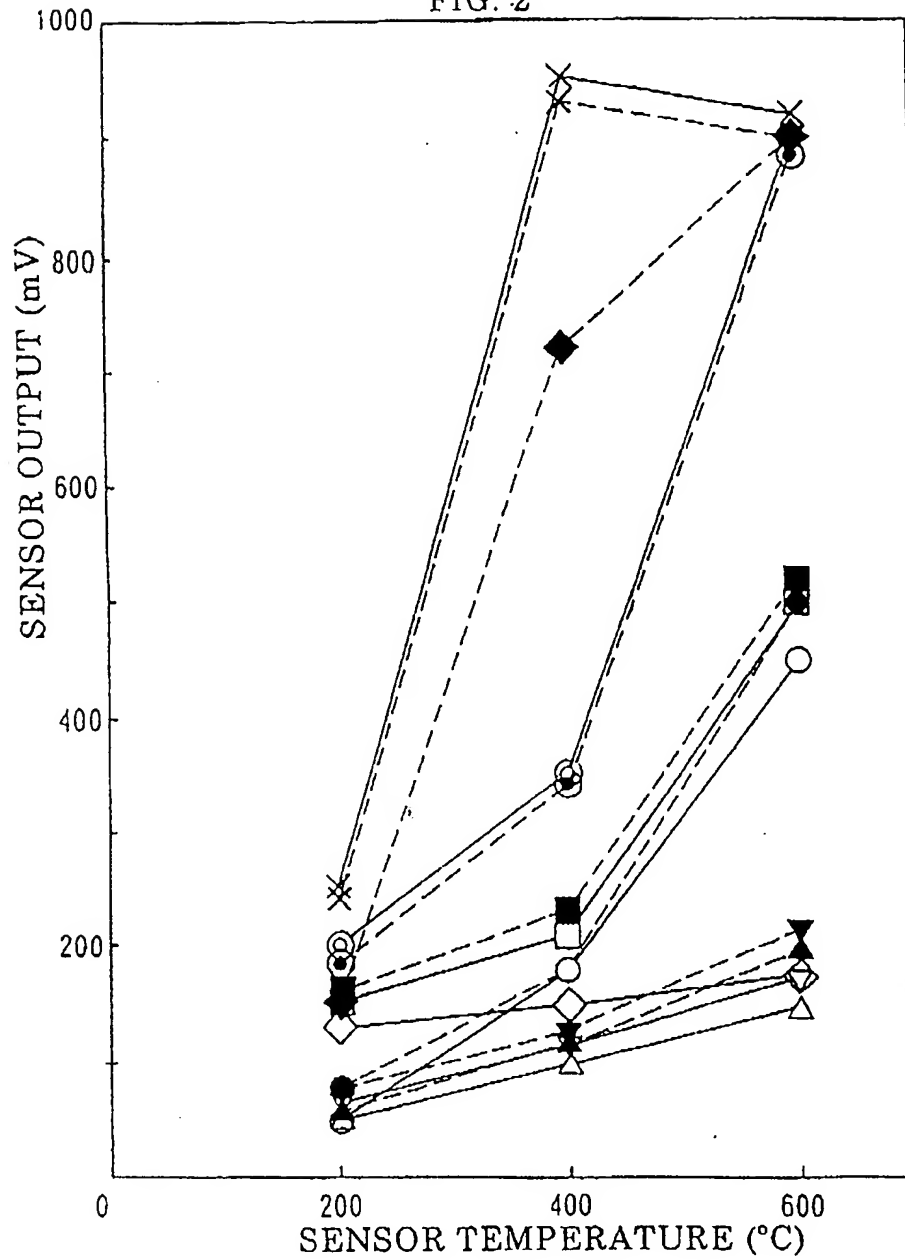

	INITIAL	AFTER TEST
EXAMPLE 1	○	●
2	△	▲
3	□	■
4	▽	▼
5	◇	◆
6	⊙	⦿
COMPARATIVE 1	×	×

FIG. 3A

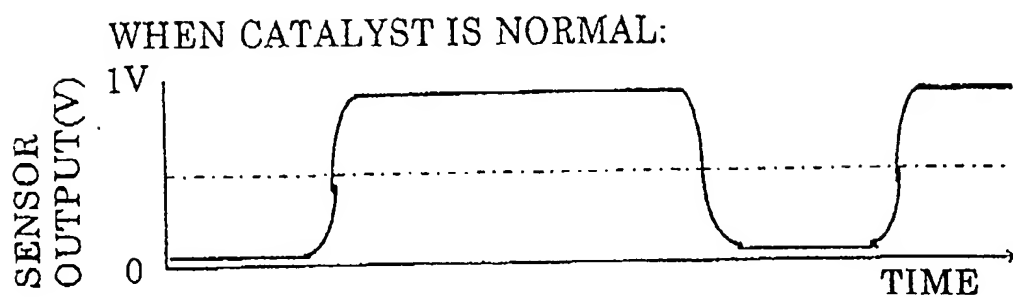


FIG. 3B

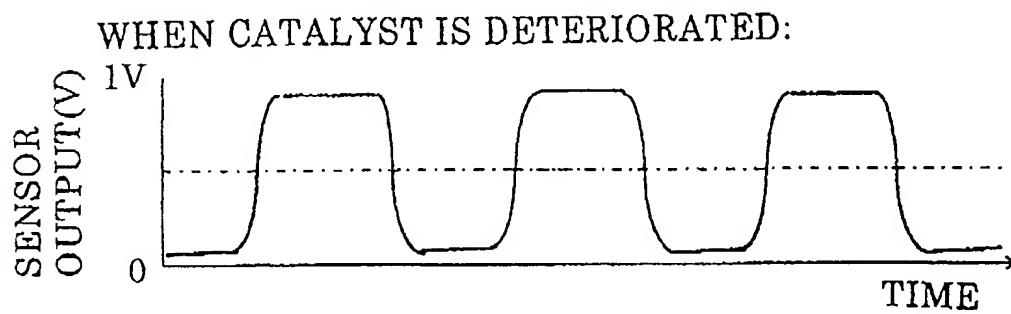


FIG. 3C

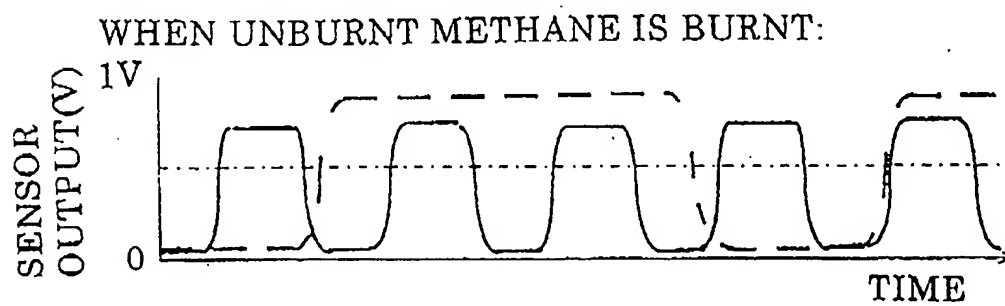


FIG. 4A

WHEN CATALYST IS NORMAL:


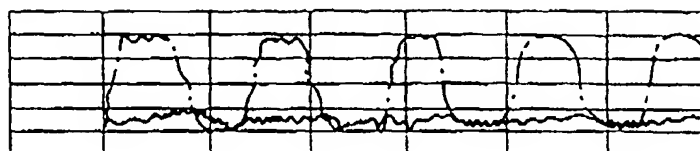


FIG. 4B

WHEN CATALYST IS DETERIORATED:



--- OXYGEN SENSOR BEFORE CATALYST
 — OXYGEN SENSOR BEHIND CATALYST

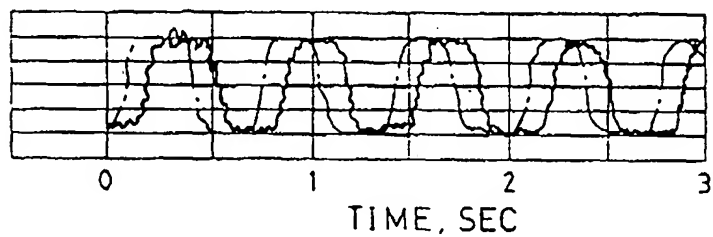

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 11 4866

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cls.)
X	PATENT ABSTRACTS OF JAPAN vol. 097, no. 012, 25 December 1997 & JP 09 203719 A (YAZAKI CORP; OSAKA GAS CO LTD; TOYOTA CENTRAL RES & DEV LAB INC), 5 August 1997 * abstract; figures 1-11 *	1-14	G01N27/407
X	US 4 107 019 A (TAKAO HIROSHI ET AL) 15 August 1978 * figures 1, 2 *	1-14	
A	US 5 326 597 A (SAWADA TOSHIKI ET AL) 5 July 1994 * figure 2 *	1-14	
A	EP 0 331 050 A (JAPAN ELECTRONIC CONTROL SYST) 6 September 1989 * figures 3C, 4 *	1-14	
A	US 3 941 673 A (TAKAO HIROSHI ET AL) 2 March 1976 * figure 3 *	1-14	TECHNICAL FIELDS SEARCHED (Int.Cls.)
A	US 4 049 524 A (TOGAWA KIMMOCHI ET AL) 20 September 1977 * figure 1 *	1-14	G01N
A	US 3 981 785 A (SANDLER YEHUDA L) 21 September 1976 * figure 1 *	1-14	

-/--			
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 18 November 1998	Examiner Mason, W
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date O : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 (03.02) (P04031)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 11 4866

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	HAALAND D M: "Noncatalytic electrodes for solid-electrolyte oxygen sensors" JOURNAL OF THE ELECTROCHEMICAL SOCIETY, APRIL 1980, USA, vol. 127, no. 4, pages 796-804, XP002084798 ISSN 0013-4651 * page 797 - page 798 *	1-14	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 18 November 1998	Examiner Mason, W
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1500 08 92 (P44C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 11 4866

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-11-1998

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4107019 A	15-08-1978	JP 1122955 C	12-11-1982
		JP 53048594 A	02-05-1978
		JP 56017019 B	20-04-1981
		DE 2746381 A	20-04-1978
		GB 1588176 A	15-04-1981
US 5326597 A	05-07-1994	JP 2212757 A	23-08-1990
		JP 2212758 A	23-08-1990
		JP 2649405 B	03-09-1997
		JP 2212759 A	23-08-1990
		DE 4004172 A	16-08-1990
EP 0331050 A	06-09-1989	US 5160598 A	03-11-1992
		JP 1221654 A	05-09-1989
		DE 68922331 D	01-06-1995
		DE 68922331 T	19-10-1995
		US 5006221 A	09-04-1991
US 3941673 A	02-03-1976	JP 953873 C	31-05-1979
		JP 50046394 A	25-04-1975
		JP 53034077 B	19-09-1978
		AU 471464 B	29-04-1976
		AU 7170874 A	29-01-1976
		DE 2437604 A	13-03-1975
US 4049524 A	20-09-1977	GB 1423086 A	28-01-1976
		JP 1164241 C	26-08-1983
		JP 52007293 A	20-01-1977
		JP 57054744 B	19-11-1982
		DE 2630746 A	03-02-1977
US 3981785 A	21-09-1976	GB 1512347 A	01-06-1978
		BE 753655 A	31-12-1970
		CA 919777 A	23-01-1973
		FR 2051855 A	09-04-1971
		US 8843038 I	03-02-1976

EPD FORM P/1989

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.